

CR6300

AX3000

Dual Band Gigabit

Wi-Fi 6 Mesh Router



Main Features



Dual-band WiFi



IPV6



WAN/LAN adaptive



Access Control



Mesh



VPN



WEB UI 3.0



guest Wi-Fi




CR6300 Wi-Fi 6 Mesh Router is a new generation SOHO high-performance wifi6 router. It adopts an Realtek chip, has 2.4g 2X2 and 5G 2X2 omnidirectional multi-band high-gain antennas.

The CR6300 is a gigabit Wi-Fi6 router designed for home users looking for a performance experience. Mesh networking is supported, which can easily solve the problem of Wi-Fi coverage of oversized houses. Both dual-band support Wi-Fi 6(802.11ax) technology, concurrent speed up to 3000Mbps (5GHz: 2400Mbps, 2.4GHz: 600Mbps), at the same time equipped with 7dbi high-gain antenna, Wi-Fi through the wall stronger, longer transmission distance. OFDMA+MU-MIMO technology is adopted to meet the needs of more devices to access the Internet at the same time, which significantly improves the transmission efficiency and greatly reduces the delay.

Indicator



Application scenario

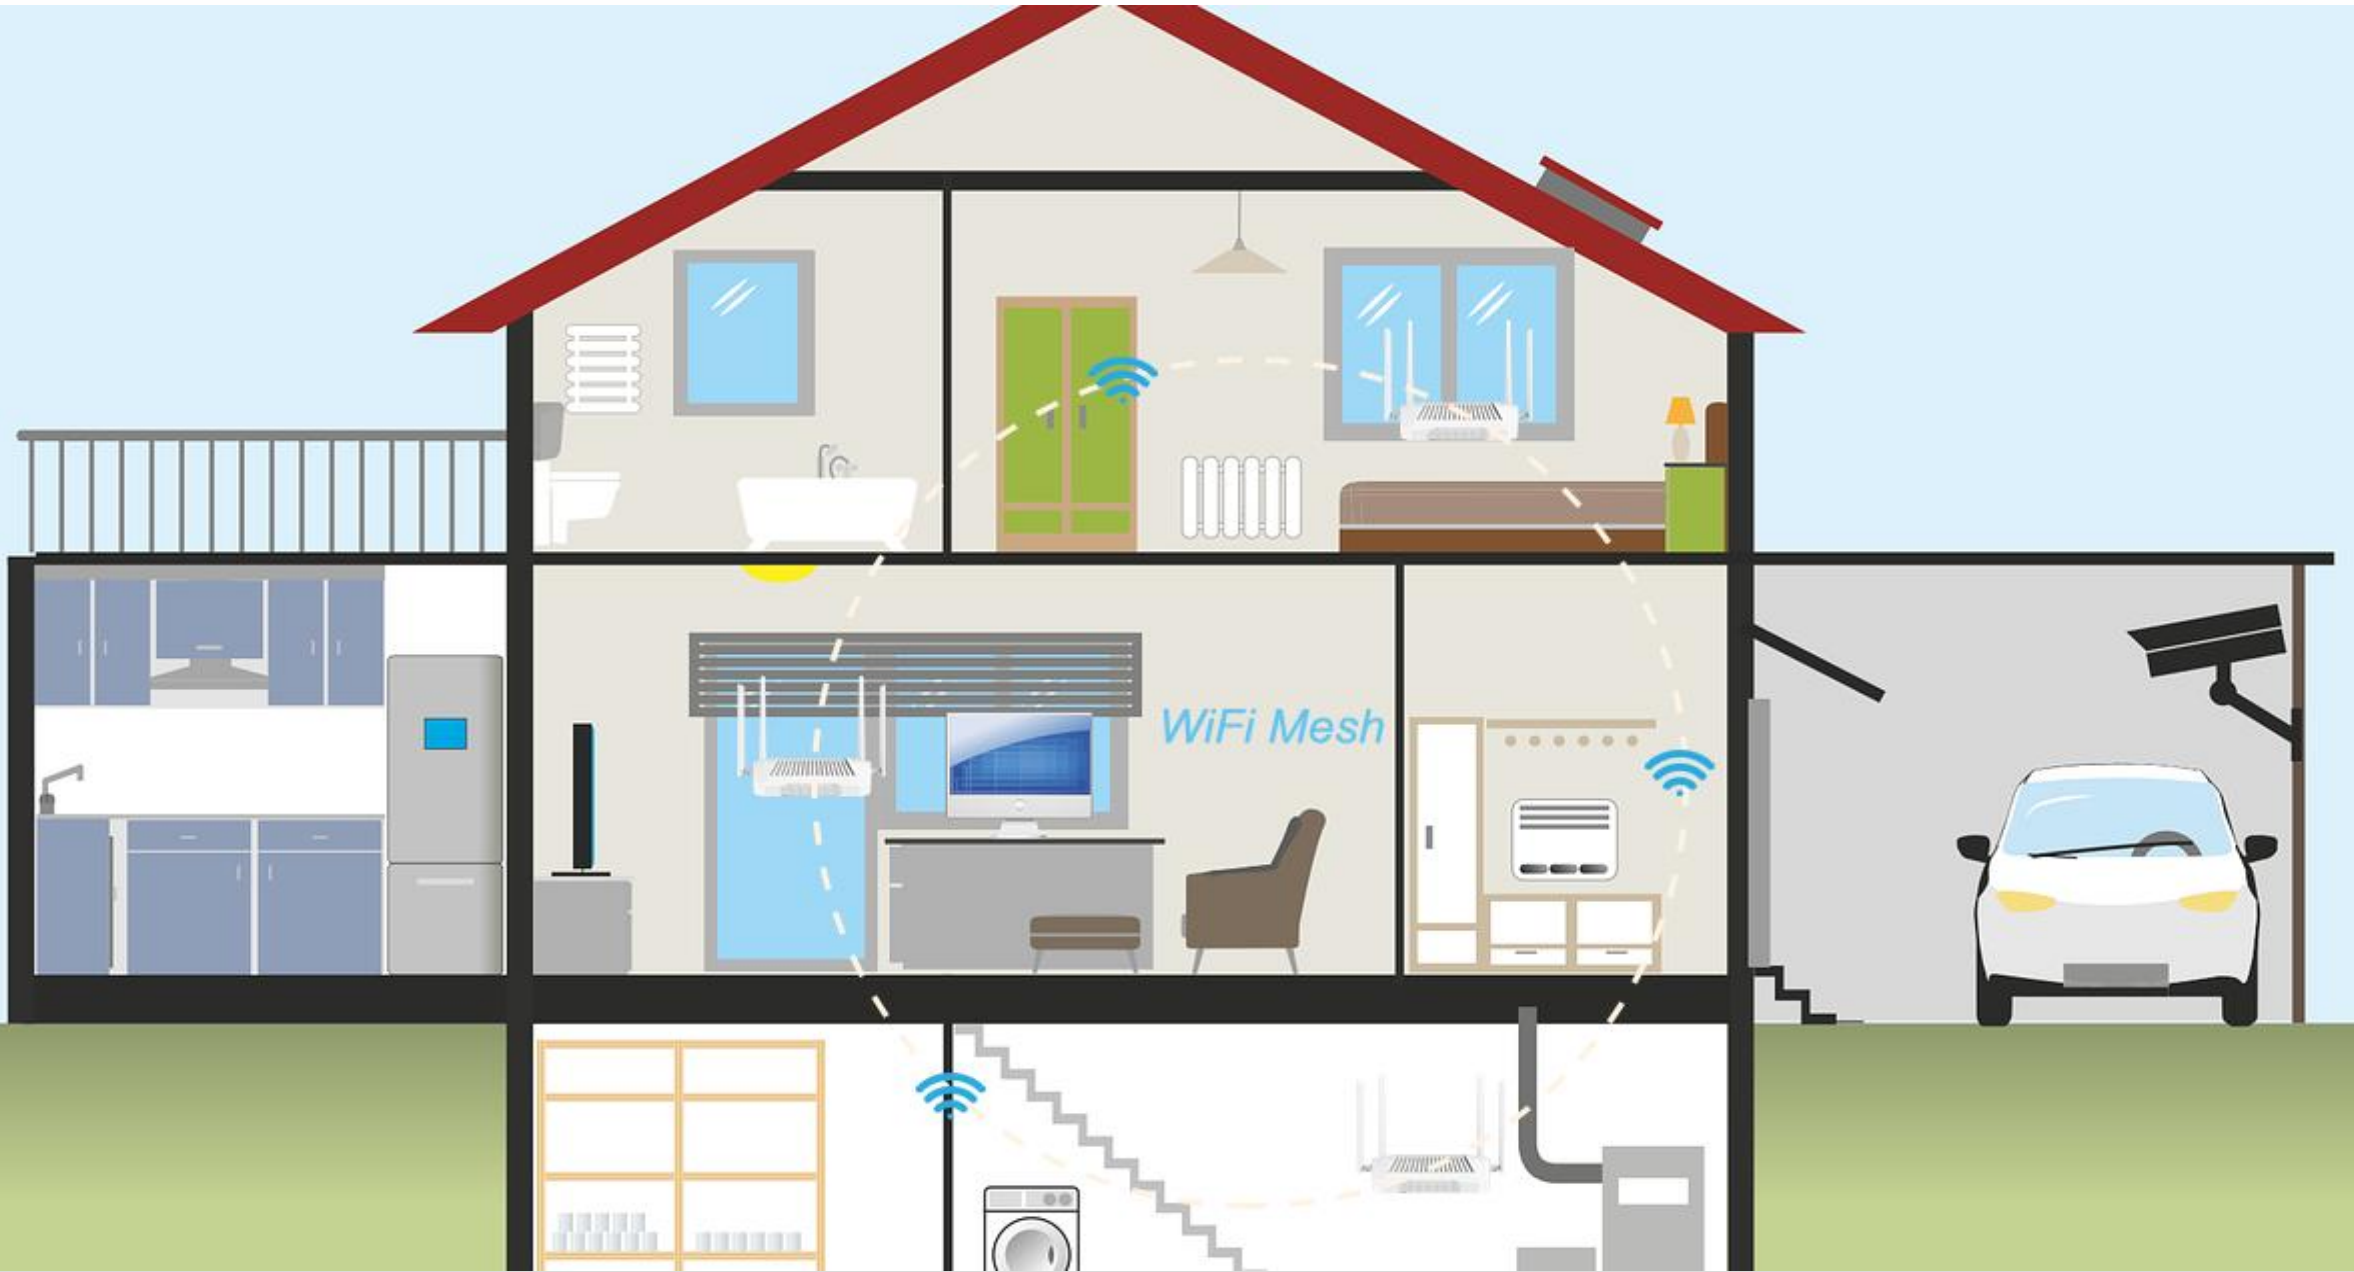

Hardware Features



Name	AX3000 Wireless Router	
Model	CR6300	
Chip	RTL8198D+RTL8832CR+RTL8192XBR	
Memory /Storage	2Gb/1Gb	
Wi-Fi Antennas	2×2.4GHz 2×5GHz External 7dBi Gain	
Protocol	IEEE 802.11a/b/g/n/ac/ax	
Wi-Fi Speed	2.4G Wi-Fi (Speed 600Mbps) 5G Wi-Fi (Speed 2400Mbps)	
LED	Power/INT	Green: Successfully connected to the network Blinking:Power is normal but the network connection fails Off: Power off
	Wi-Fi	Green: Wi-Fi up Off: Wi-Fi down
	Mesh	Green:Successful Mesh networking Blinking:Building a Mesh network Off:The Mesh network is not formed

Interface	WAN/LAN	4 RJ45 port ,10/100/1000Mbps
	Mesh/WPS	Button
	Reset	Button
	USB 2.0	Optional
Transmit Power	2.4G	23dBm
	5G	21dBm
Power Supply	DC12V/2A Adapter	
Power Consumption	<24W	
Dimension		
Operating Temperature	-10 ~ 50°C	
Storage Temperature	-30 ~ 70°C	

Software Features



IP Protocols	IPv4/IPv6
Wi-Fi6 Tech	Long OFDM Symbol OFDMA DL/UL MU-MIMO TWT BSS Coloring WPA3
WAN Mode	Dynamic IP Static IP PPPoE
Security	Firewall Access Control Port Mapping DMZ ALG Terminal Management Parental Control
System Service	Network Time Software Upgrade Backup and Restore System Logs

Guest Wi-Fi	2.4G Guest SSID 5G Guest SSID
Equipment Mode	Router Bridge Relay
Management	WEB
Network Settings	Local Area Network (LAN) Settings Wide Area Network (WAN) Port Settings VPN IPTV Multicast UPnP (Universal Plug and Play) DDNS
Mesh	EasyMesh

Product Model	Product Description
CR6300	4*10/100/1000Base-Tx Ethernet WAN/LAN port, external 4*7dBi antennas, support 2.4G/5G dual frequency, support 802.11 a/b/g/n/ac/ax protocol, wireless transmission rate 3000Mbps, 12VDC power supply.

Contact Us

Shenzhen C-Data Technology Co.,Ltd.
Address: 2nd Floor, Building A4, Nanshan Zhiyuan, 1001 Xueyuan Avenue,
Nanshan District, Shenzhen, Guangdong, China, 518055

Tel: +86-755-26014509/4710/4711
Fax: +86-755-26014506
Email: marketing@cdatatec.com
Website: www.cdatatec.com